



# SPECIFICATION DATA

Type		
Displacement, cm <sup>3</sup> /rev [in <sup>3</sup> /rev]		199,8 [12.19]
Max. Speed, [RPM]	Cont.	300
	Int.*	375
Max. Torque daNm [in-lb]	Cont.	38,5 [3410]
	Int.*	46 [4070]
	Peak**	56 [4960]
Max. Output kW [HP]	Cont.	9 [12]
	Int.*	12 [16.1]
Max. Pressure Drop bar [PSI]	Cont.	140 [2030]
	Int.*	175 [2540]
	Peak**	225 [3260]
Max. Oil Flow lpm [GPM]	Cont.	60 [15.8]
	Int.*	75 [19.8]
Max. Inlet Pressure bar [PSI]	Cont.	175 [2540]
	Int.*	200 [2900]
	Peak**	225 [3260]
Max. Return Pressure with Drain Line bar [PSI]	Cont.	175 [2540]
	Int.*	200 [2900]
Max. Starting Pressure with Unloaded Shaft, bar [PSI]	Cont.	5 [73]
	Peak**	225 [3260]
Min. Starting Torque daNm [in-lb]	At max.press. drop Cont.	33 [2920]
	At max.press. drop Int.*	40 [3540]
Min. Speed***, [RPM]		10
Weight, kg [lb]	MR(F)	8 [17.6]
	MRQ(N)	7,2 [14.7]
For rear ports: +0,650 [1.433]		

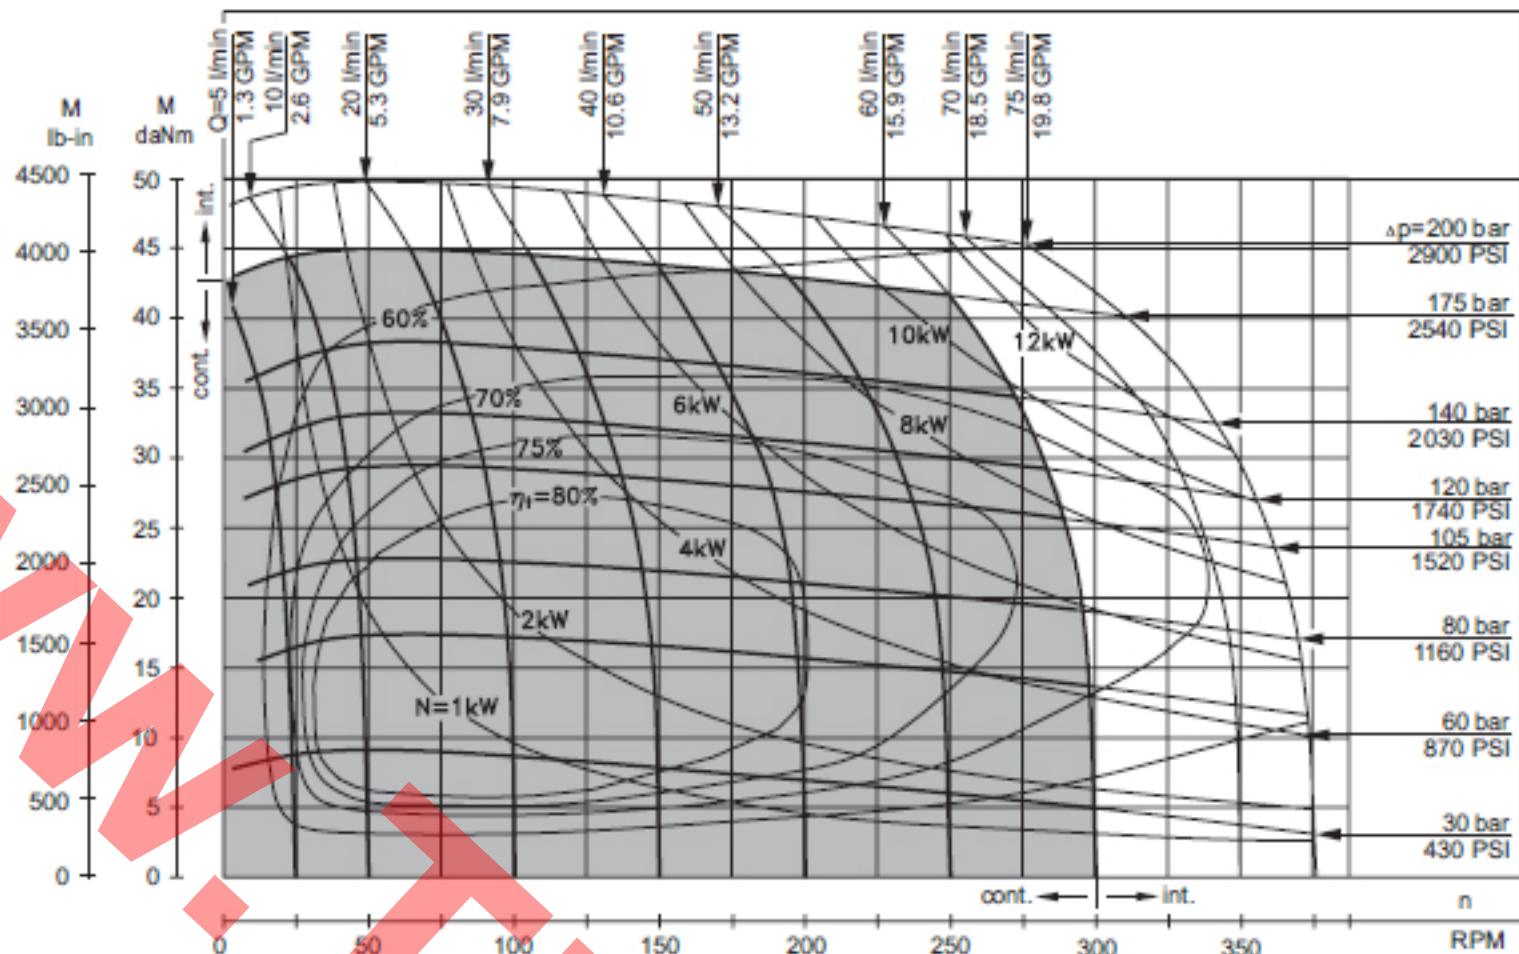


## DIMENSIONS AND MOUNTING DATA

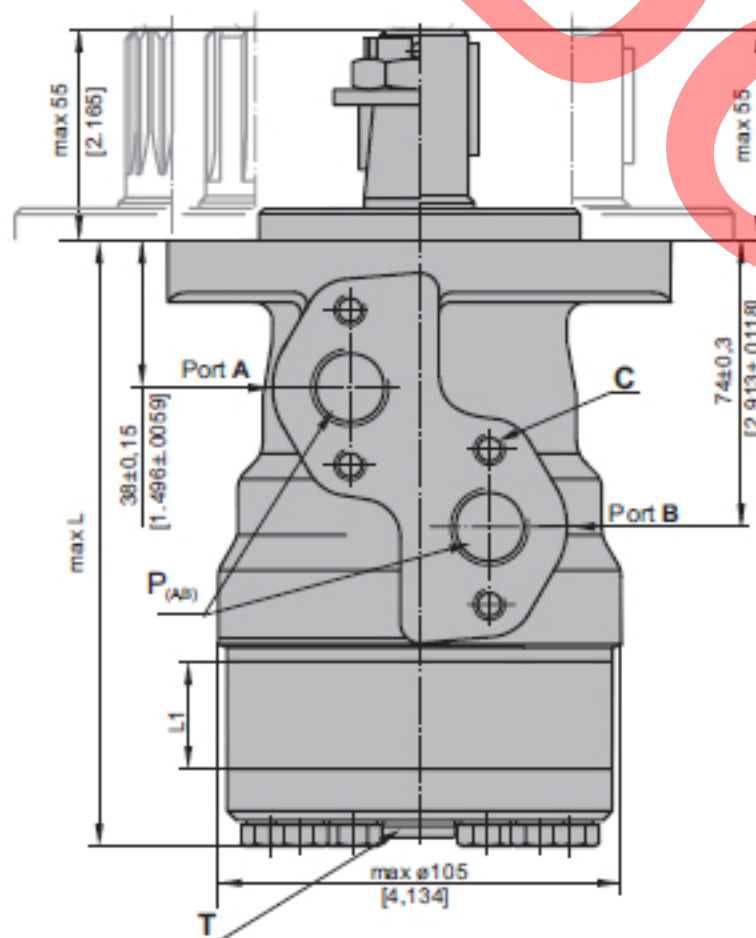

Type	L, mm [in]
200	163,5 [6.44]

## MOUNTING

Oval Mount (2 Holes)

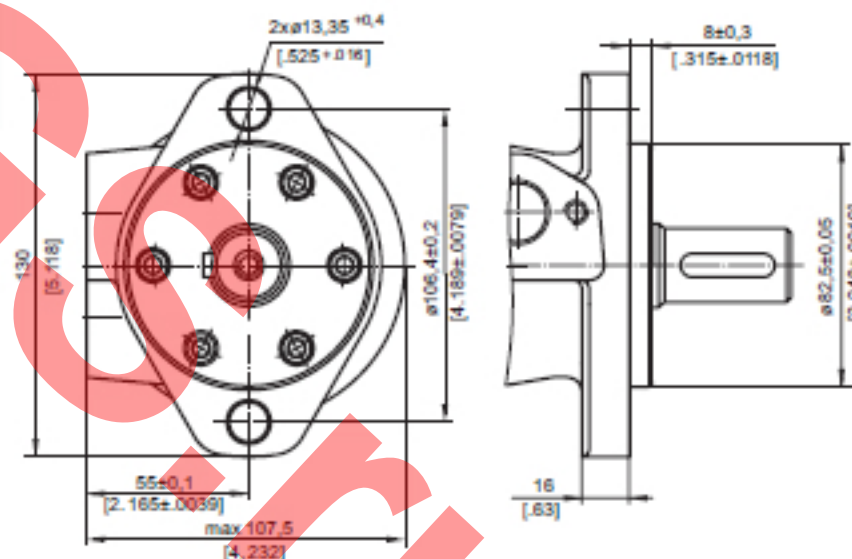

## SHAFT EXTENSIONS

ø25 straight, Parallel key A8x7x32 DIN 6885  
Max. Torque 34 daNm [3010 lb-in]

