
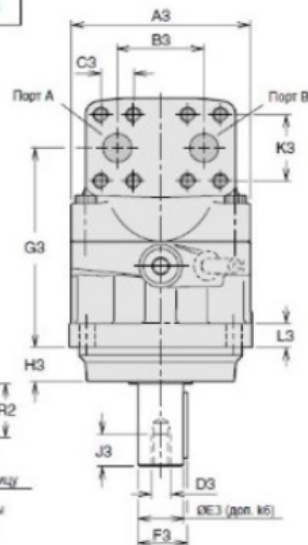


Тип 1 монтажный фланец
(ISO 3019/2)

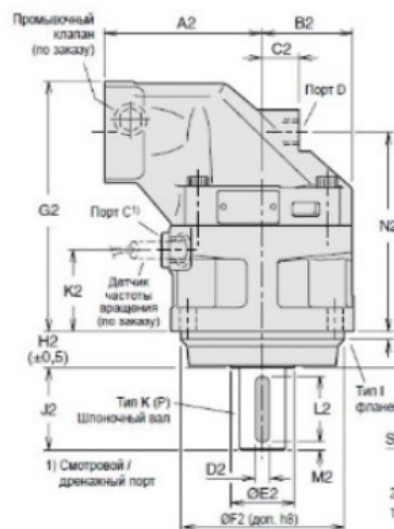

Passport	F12-30	F12-46	F12-60	F12-80 F12-90	F12-110 F12-125
A1	88.4	113.2	113.2	127.2	141.4
B1	118	140	140	158	180
C1	118	142	144	158	180
D1	11	13.5	13.5	13.5	18
A2	100	110	126	136	145
B2	59	65	70	78	85
C2	25	26	32	32	38
D2	8	8	10	12	14
E2	33	42	42	52	58
F2	100	125	125	140	160
G2	172	173	190	216	231
H2	25.5	32.5	32.5	32.5	40.5
J2 ⁽¹⁾	50	60	60	70	82
J2 ⁽²⁾	50	-	-	-	-
K2	55	52	54	70.5	68.5
L2	40	50	50	56	70
M2	5	5	5	7	6
N2	136.5	137	154	172.5	175
P2	8	8	8	8	8
Q2	28	28	33	36	41
R2 ^(a)	35	35	41	45	50
R2 ^(b)	43	35	35	41	-
S2 ^(a)	M12	M12	M12	M16	M16
S2 ^(b)	x24	x24	x28	x36	x36
	-	M12	-	M12	-
A3	122	134	144	158	170
B3	66	66	65	75	83
C3	23.8	23.8	23.8	27.8	31.8
D3	M12	M12	M12	M16	M16
E3	30	30	35	40	45
F3	33	33	38	43	49
G3	136.5	137	154	172.5	175
H3	23.5	26.5	30.5	30.5	38.5
J3	24	24	28	36	36
K3	50.8	50.8	50.8	57.2	66.7
L3	18	20	20	20	22
T3	-	-	-	-	68

- 1) Шпоночный вал тип К
- 2) Шпоночный вал тип Р
- 3) Шлицевой вал тип D
- 4) Шлицевой вал тип Z
- 5) Специальный № 264

Порт	F12-30	F12-46	F12-60	F12-86	F12-110
A, B					
размер	3/4"	3/4"	3/4"	1"	1 1/4"
Внутр. резьба ¹⁾	M10	M10	M10	M12	M16
резьба ²⁾	x20	x20	x20	x20	x24
резьба ³⁾	M22	M22	M22	M22	M22
резьба ⁴⁾	x1,5	x1,5	x1,5	x1,5	x1,5
D					
резьба ⁵⁾	M16	M16	M22	M22	M22
резьба ⁶⁾	x1,5	x1,5	x1,5	x1,5	x1,5
E					
резьба	-	-	-	-	M22
					x1,5

А, В. ISO 6102 1) Метрическая резьба x глубина в мм
2) Метрическая резьба x шаг в мм.

Тип D (стандартный)

Тип D (стандартный)		Тип Z (no saws)
F12-30	W30x2x14x9g	W25x1.25x18x9g
-40	W32x2x14x9g	W30x2x14x9g
-60	W35x2x16x9g	W32x2x14x9g
-80	W40x2x18x9g	W35x2x16x9g
-100	W40x2x18x9g	W35x2x16x9g
-110	W45x2x21x9g	W40x2x16x9g
-125	W45x2x21x9g	W40x2x16x9g

Tien H.

	(стандартный)	(по заказу)	(по заказу)
F13-30	Ø30	Ø25	-
-40	Ø30	-	Ø35 ¹⁾
-60	Ø36	-	-
-80	Ø40	-	-
-90	Ø40	-	-
-110	Ø45	-	-
-125	Ø45	-	-

* макс. рабочее давление 350 бар

F12-xxx-MF-IV-P-000-0000-P0

